

Panasonic

CV-CFN203L

Smart look Day/ Night Fixed Dome Camera with IR illuminator



Specifications

| Parameter | CV-CFN203L |
|-------------------------|--|
| Camera | |
| Image Sensor | 1/2.9" 2.0 Mega Pixels CMOS |
| Effective Pixels | 1936 (H) x 1097 (V) |
| Min Illumination | 0.02Lux/ F2.0, 0Lux IR on |
| Electronic Shutter | PAL : 1/25s~1/100,000s NTSC: 1/30s~1/100,000s |
| Video Frame Rate | PAL : 25fps NTSC: 30fps |
| Synchronization | Internal |
| Day & Night | Auto (ICR)/ Color/ B/W |
| Max IR Distance | 20m |
| Digital Noise Reduction | 2D |
| White Balance | Auto |
| AGC | Auto |
| BLC | Auto |
| Lens | |
| Focal Length | 3.6 mm |
| Angular Field of View | H: 82.8° V: 44.2° |
| Lens Type | M12 |
| Input / Output | |
| Video Output | 1CH BNC HD-CVI video output |
| General | |
| Power | DC 12V±25% |
| Power Consumption | 2.8W MAX |
| Working Temperature | -30°C~+60°C. Less than 95% RH (no condensation) |
| Dimensions | Φ85.0 mm × 69.0mm |
| Weight (approx.) | 100g |
| External Case | Plastic |

*Refer to DVR spec sheet for recording frame rate limitation


Key Features

- High-performance CMOS image sensor.
- Support 1080p@25fps (PAL)/ 30fps (NTSC)
- Support 75-3 coaxial cable (Belden 9259 or equivalent) transmission up to 500m.
- High speed & long distance real-time transmission.
- Support ICR for day time and night time operation.
- Support auto exposure, auto white balance, auto electronic shutter and auto gain function.
- Support DC12V power supply.

Standard Accessories

- Quick guide.....1 pc
- Important safety instruction.....1 pc

Appearance

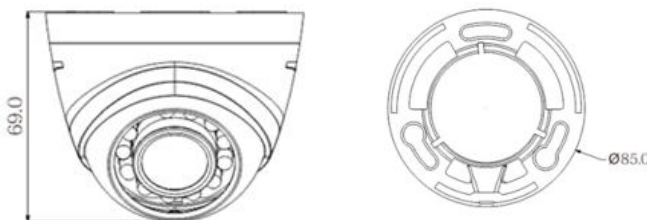

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: