



## SF/UTP Category 6 Cables

Content of Data Sheet		
Product model	CAB-LC3200A-IN	
Product specification	HSYV-6 4x2x0.585	
Test Standard	ISO/IEC11801、TIA-568-C.2、YD/T1019	
Conductor	Material	OFC(Oxygen free copper)
	AWG	23
	Nom.O.D.(mm)	0.585±0.05 mm
	DC resistance	≤65.8 Ω/km
Insulation	Material	HDPE
	Thickness	0.2±0.02 mm
	Diameter	1.16±0.05 mm
	Color	Blue/White- Blue Orange/White-Orange
Pitch	Offset pitch	≤20 mm
	Cable pitch	≤120 mm
Sheath	Material	PVC(complies RoHS/REACH)
	External O.D.	7.6±0.4 mm
	Color	Blue
	Tensile strength	>13.5 Mpa
	Thickness	0.6±0.05 mm
Surface Printing	Letter height	3.0±0.3 mm
	Color	Black
	Print error & Space	1±0.005 m
	Case number	Yes
Packing	Wooden shaft	

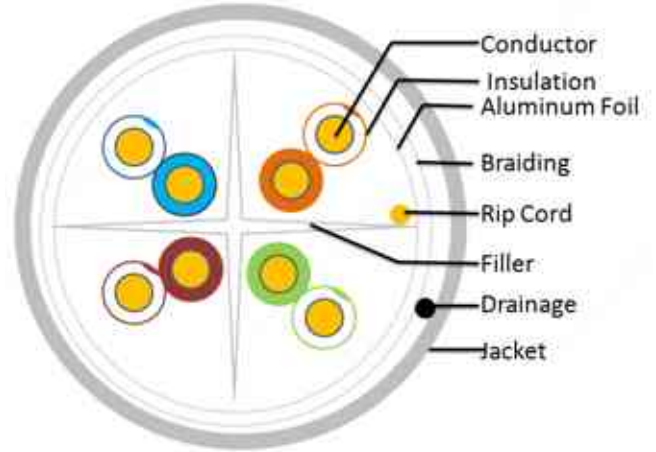

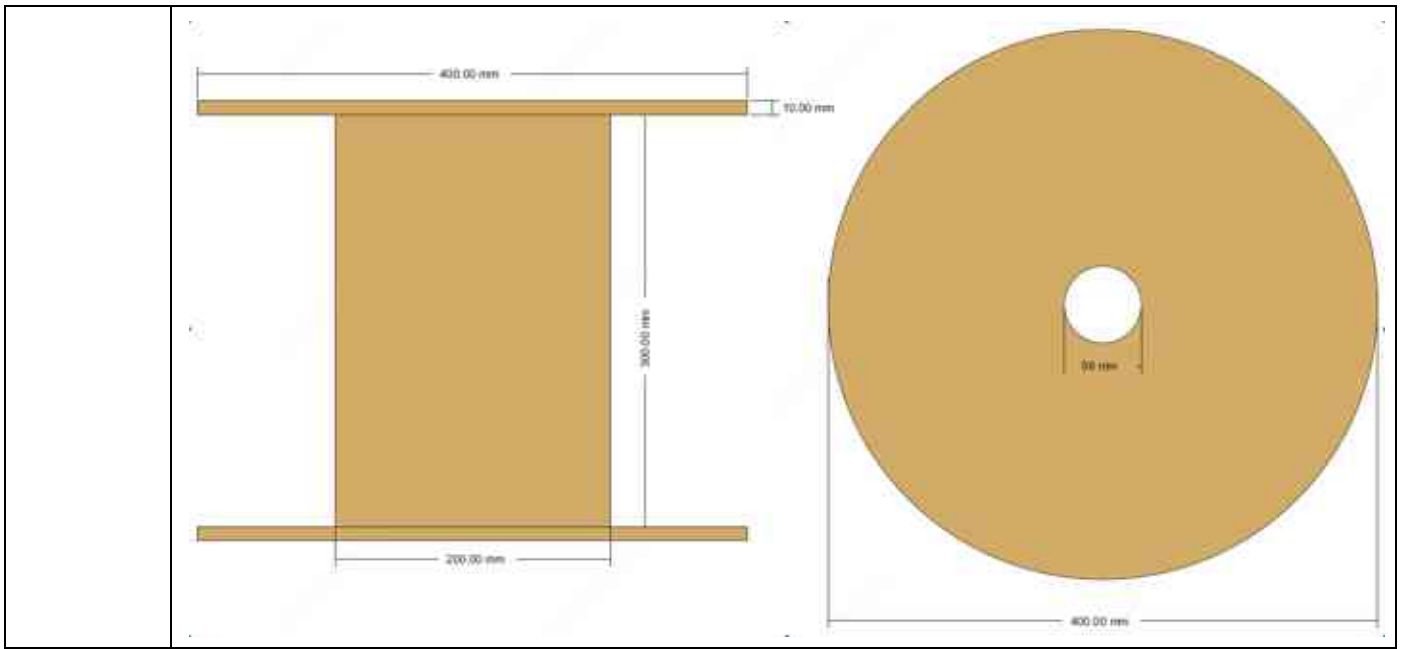

Packing length	305±1m		
Rip-cord	Yes	Crossing backbone	Yes
Ambient temperature	-20°C ~ 60°C		

**Zhejiang Uniview Technologies Co.,Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

 Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.