

# SpeedFace -H5

## 3-in-1 Starter Facial Recognition Terminal with 5-inch Touch Display



Proactive Facial Recognition



New Height of Anti-Spoofing



Speedy Recognition



Wide Pose Angle Acceptance



Touchless for Better Hygiene




### Features

- Enhanced Visible Light Facial Recognition with Copmuter Vision built-in
- 3-in-1 verification with Fingerprint, RFID and Facial Recognition
- 5-inch touch LCD
- Dual-camera for real-time face detection
- 6,000 face template capacity
- Recognition distance: 0.3 - 3 m
- Compatible with external RS232, RS485 and Wiegand reader
- TCP / IP, Wi-Fi communication

### Recognition distance up to 3m long and extra wide angle recognition

The recognition distance has been greatly extended up to 3 meters long, which significantly improves maximum traffic rate. While most of algorithms only support 15-degree angle facial recognition, ZKTeco supports 30-degree angle facial recognition.

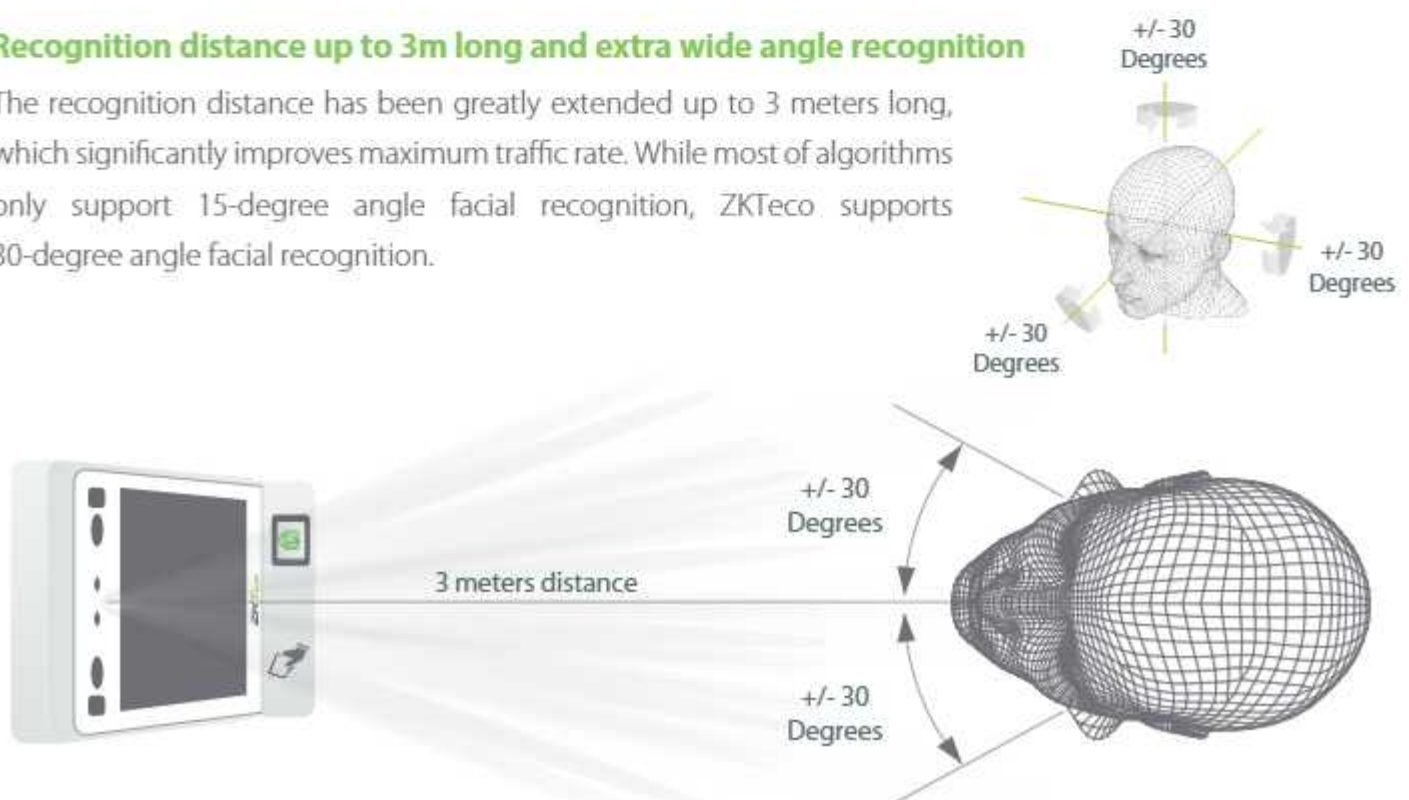

## Specifications

	<b>Model</b>	SpeedFace-H5
<b>Hardware</b>	<b>LCD</b>	5-inch touch screen
	<b>CPU</b>	Quad-core A17 1.8GHz
	<b>Memory</b>	2G RAM / 16G ROM
	<b>Camera</b>	2MP dual lens
	<b>Communication</b>	TCP / IP, Wi-Fi (optional) RS232, RS485 for external reader Wiegand Input/Output
	<b>Accessory</b>	Door lock, door sensor, alarm, exit button and auxiliary input
	<b>Audio</b>	Loudspeaker
<b>Capacity</b>	<b>Users</b>	10,000
	<b>Face Template</b>	6,000
	<b>Fingerprint</b>	10,000
	<b>RFID</b>	10,000
	<b>Log</b>	200,000
<b>Operating</b>	<b>Voltage</b>	12V 3A
	<b>Temperature</b>	-10°C ~ 45°C
	<b>Humidity</b>	10% ~ 90%
	<b>Software</b>	ZKBioAccess

## Optional Accessories



RS485  
Fingerprint Reader



RFID Reader



Exit Button



Electric Lock



Alarm



Sensor

## Dimensions (mm)

